

ASTAV BAFFLE CEILING SPECIFICATIONS

General Description:

Aluminum/Galvanized Steel ceiling panels supported by fully concealed suspension system manufactured in accordance with European standards by ASTAV that have ISO9001:2008, TS EN 13964 : 2008 and CE certificates.

Panel Description:

- Raw material: Ceiling panels manufactured from ... mm Aluminum/Galvanized Steel.
- Panel sizes (Width x Height): 25x75mm, 30x75mm, 40x75mm, 50x75mm, 25x100mm, 30x100mm, 40x100mm, 50x100mm
- Color : Ceiling panels coated electrostatic applied powder coating colored RAL ... (min. 25 µ thickness and approx. %20 Gloss Rate)

Suspension System:

1. As-Carrier[®] Galvanized Steel Omega Carrier, 0.70mm thickness,
2. As-Carrier[®] Hanger Spring
3. As-Carrier[®] Galvanized Hanger: Ø4 mm, 500mm length (Standard)
4. As-Carrier[®] Sleeve Anchor that coated by zinc against corrosion

Installation:

The first hanger system should not exceed 450 mm distance from the wall and the distance between hangers could be max 1000mm. As-Carrier[®] Clip-in Hanger Spring, As-Carrier[®] Galvanized Hanger and As-Carrier[®] Sleeve Anchor will be used to suspend the As-Carrier[®] Omega Carrier securely. The distance between Wall and As-Carrier[®] Omega Carrier should be max. 600 mm. The distance between As-Carrier[®] Omega Carrier should not exceed 1200mm. Finally, Astav Baffle Ceiling Panels will be fixed to As-Carrier[®] Omega Carrier.

ASTAV PANEL ALÜMİNYUM SAN. TİC. LTD. ŞTİ.

Saray Mah. Keresteciler San. Sit. 10.Sokak No: 41, 06980 Kazan / Ankara / Türkiye

Tel : (+90-312) 815 12 42(pbx)

Fax: (+90-312) 354 32 16


e-mail: info@astav.com.tr

web: www.astav.com.tr

astav[®]

Astav Panel Alüminyum San.Tic.Ltd.Şti.

METAL ASMA TAVAN

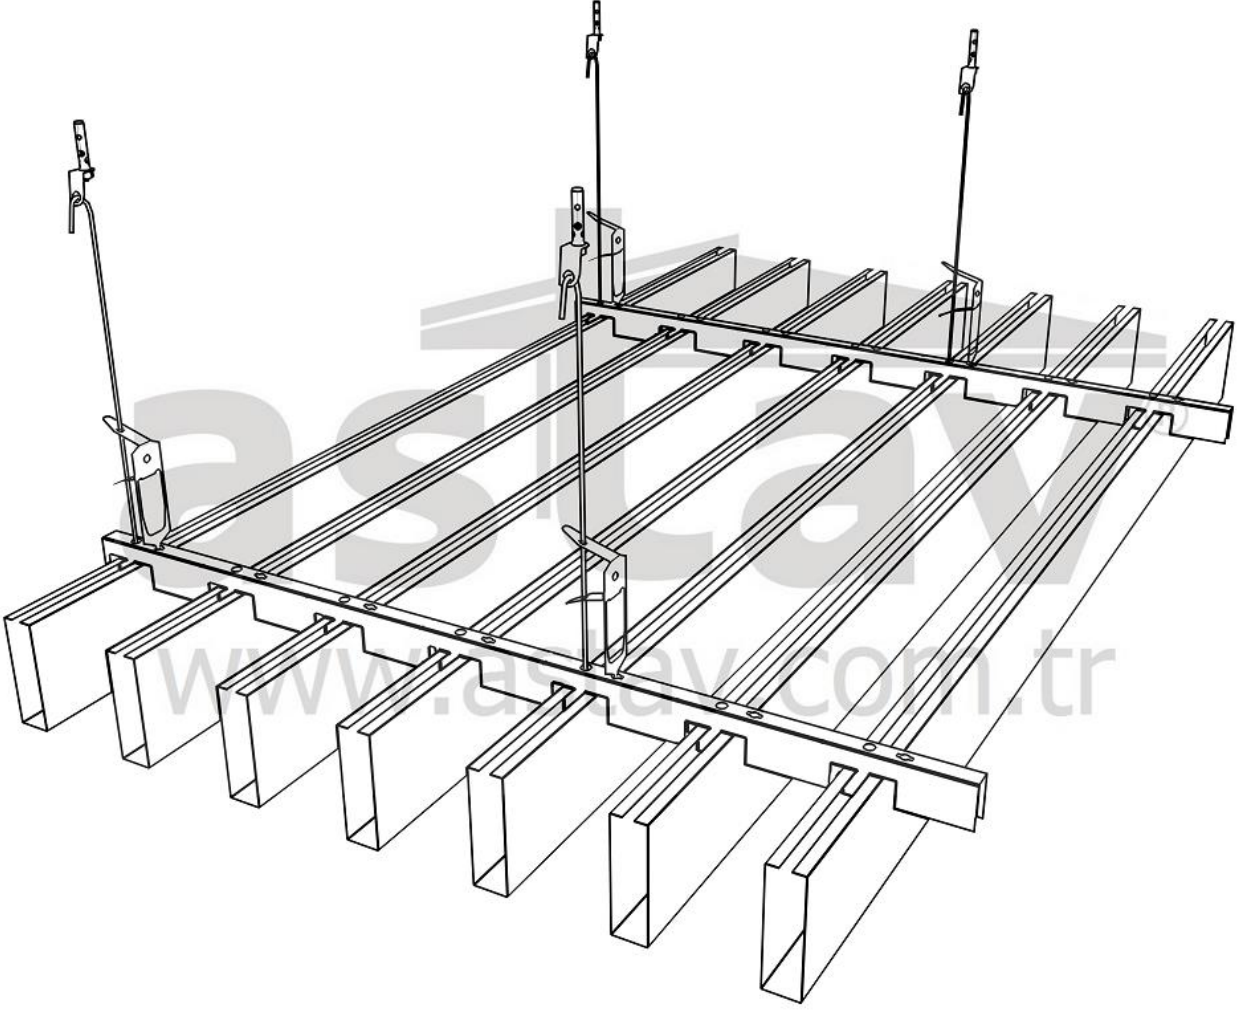

ASTAV PANEL ALÜMİNYUM SAN. TİC. LTD. ŞTİ.

Saray Mah. Keresteciler San. Sit. 10.Sokak No: 41, 06980 Kazan / Ankara / Türkiye

Tel : (+90-312) 815 12 42(pbx)

Fax: (+90-312) 354 32 16

e-mail: info@astav.com.tr

web: www.astav.com.tr