

ASTAV STRIP PANEL CEILING SPECIFICATIONS

General Description:

Aluminum ceiling panels supported by fully concealed suspension system manufactured in accordance with European standards by ASTAV that have ISO9001:2008, TS EN 13964: 2008 and CE certificates.

Panel Description:

- Raw material: Ceiling panels manufactured from 0,70mm Aluminum.
- Panel width (mm): 200mm
- Color : Ceiling panels coated electrostatic applied powder coating colored RAL ... (min. 25 µ thickness and approx. %20 Gloss Rate)
- Perforation: Ceiling panels are perforated Ø2.0 mm and plain/flat/imperforated.

Suspension System:

1. As-Carrier® Galvanized Steel Omega Carrier, 0.60mm thickness,
2. As-Carrier® Wall angle "U": Prepainted Galvanized Steel, 0.50mm thickness,
3. As-Carrier® Hanger Spring
4. As-Carrier® Galvanized Hanger: Ø4 mm, 500mm length (Standard)
5. As-Carrier® Sleeve Anchor that coated by zinc against corrosion

Installation:

As-Carrier® Wall angle "U" should be used for lateral sides facing inwards of the wall. The first hanger system should not exceed 450 mm distance from the wall and the distance between hangers could be max 1000mm. As-Carrier® Clip-in Hanger Spring, As-Carrier® Galvanized Hanger and As-Carrier® Sleeve Anchor will be used to suspend the As-Carrier® Omega Carrier securely. The distance between As-Carrier® Wall angle "U" and As-Carrier® Omega Carrier should be max. 600 mm. The distance between As-Carrier® Omega Carrier should not exceed 1200mm.

ASTAV PANEL ALÜMİNYUM SAN. TİC. LTD. ŞTİ.


Saray Mah. Keresteciler San. Sit. 10.Sokak No: 41, 06980 Kazan / Ankara / Türkiye

Tel : (+90-312) 815 12 42(pbx)

Fax: (+90-312) 354 32 16

e-mail: info@astav.com.tr

web: www.astav.com.tr

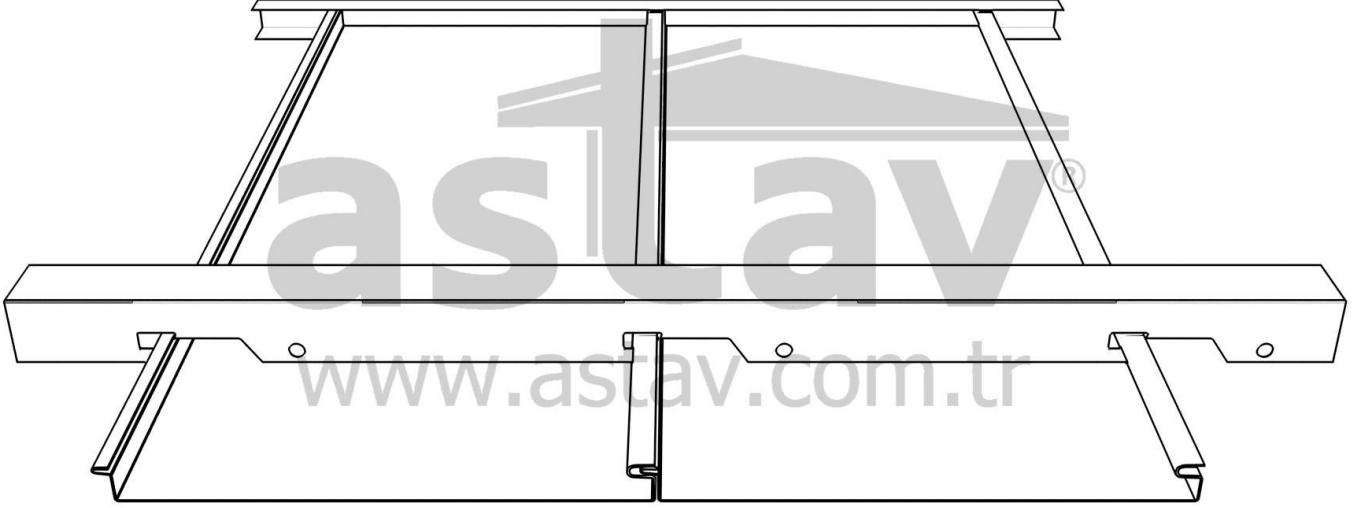

ASTAV PANEL ALÜMİNYUM SAN. TİC. LTD. ŞTİ.

Saray Mah. Keresteciler San. Sit. 10.Sokak No: 41, 06980 Kazan / Ankara / Türkiye

Tel : (+90-312) 815 12 42(pbx)

Fax: (+90-312) 354 32 16

e-mail: info@astav.com.tr

web: www.astav.com.tr