

## ... x ... mm Cell Sized Open Cell Ceiling System

### General Description:

Galvanized Steel ceiling panels supported by own suspension system manufactured in accordance with European standards by ASTAV that have CE, ISO9001:2008, TS EN 13964 : 2008 certificates.

Ceilings are tested in accordance with EN 13501-1 and must be designed to comply with at least Euro class B-S1-D0

### Panel Description:

- Raw material: Ceiling panels manufactured from 0.40mm Galvanized Steel.
- Profile Size(W x H): 15mm x 40mm
- Color : Ceiling panels coated electrostatic applied powder coating colored RAL ... ( min. 25  $\mu$  thickness and approx. %20 Gloss Rate)
- Cell Size: Standard cell sizes are 50x50mm, 75x75mm, 100x100mm and 150x150mm or Customized.

### Suspension System:

1. As-Carrier<sup>®</sup> Wall Angle "L": Prepainted Galvanized Steel, 0.40mm thickness, 20x20x3050mm
2. As-Carrier<sup>®</sup> Steel Hanger Spring
3. As-Carrier<sup>®</sup> Steel Hanger Clips
4. As-Carrier<sup>®</sup> Galvanized Hanger:  $\varnothing$ 4 mm, 600mm length (Standard)
5. As-Carrier<sup>®</sup> Sleeve Anchor that coated by zinc against corrosion

### Installation:

As-Carrier<sup>®</sup> Wall Angle should be used for lateral sides facing inwards of the wall. The first hanger system should not exceed 450 mm distance from the wall and the distance between hangers could be max 1000mm. As-Carrier<sup>®</sup> Hanger Spring, As-Carrier<sup>®</sup> Galvanized Hanger and As-Carrier<sup>®</sup> Sleeve Anchor will be used to suspend Astav<sup>®</sup> Cell Main Carrier securely. (See System Drawing,pg.2). The distance between As-Carrier<sup>®</sup> Wall Angle and Astav<sup>®</sup> Cell Main Carrier should be max. 600 mm. The distance between Astav<sup>®</sup> Cell Main Carrier should not exceed 1200mm. Astav<sup>®</sup> Cell Cross Carrier should be positioned on 600 mm away from each.

### ASTAV PANEL ALÜMİNYUM SAN. TİC. LTD. ŞTİ.

Saray Mah. Keresteciler San. Sit. 10.Sokak No: 41, 06980, Kazan / Ankara / Türkiye

**Tel :** (+90-312) 815 12 42(pbx)

**Fax:** (+90-312) 354 32 16


**e-mail:** info@astav.com.tr

**web:** www.astav.com.tr

# astav®

Astav Panel Alüminyum San.Tic.Ltd.Şti.

METAL ASMA TAVAN

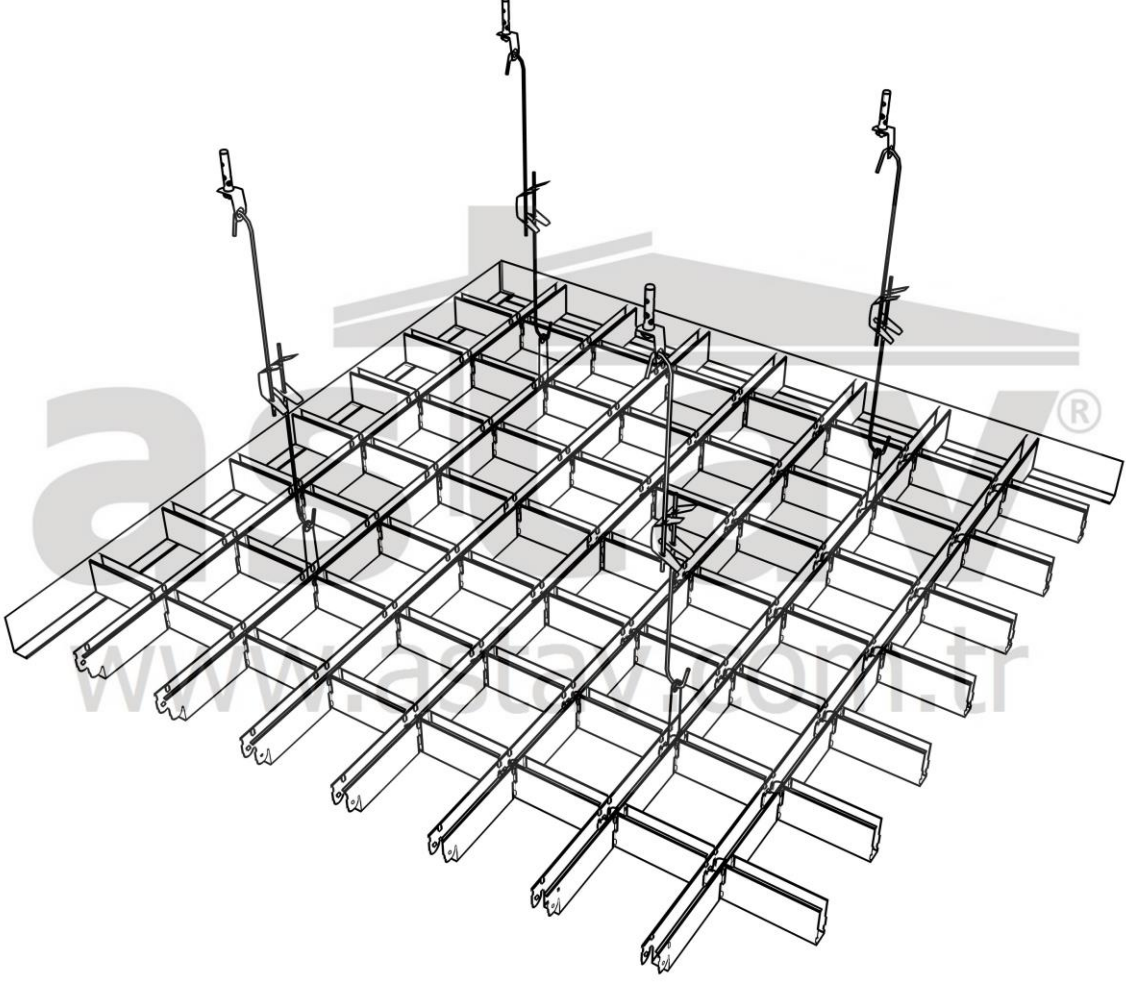

**ASTAV PANEL ALÜMİNYUM SAN. TİC. LTD. ŞTİ.**

Saray Mah. Keresteciler San. Sit. 10.Sokak No: 41, 06980, Kazan / Ankara / Türkiye

**Tel :** (+90-312) 815 12 42(pbx)

**Fax:** (+90-312) 354 32 16

**e-mail:** info@astav.com.tr

**web:** www.astav.com.tr